


## Disassembly instructions

Tyr

### STEP 1

Unplug the power connection to the luminaire by pulling apart the WAGO connectors.

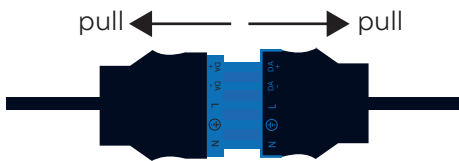

### STEP 3

Unscrew the screw(s) on the driver touch protection using a screwdriver with a PH2 head.

Unplug the LED cables by pressing down the cable securing button on the driver.

### STEP 4

Expose the light source by unscrewing the screws holding the heat sink using a suitable bit and screwdriver.

### STEP 5

Unscrew the LED holder to remove light source using a screwdriver and suitable bit.

### STEP 6

If replacing the light source; De-solder cables from light source if re-using cables, else, replace lightsource and cables and recycle accordingly.

N.B. Use thermal paste between lightsource and heat sink if replacing with a new light source.

### STEP 7

Recycle all parts accordingly.

If replacing the light source; attach new light source and remount the luminaire by following this instruction in reverse.

### STEP 2

Take down the luminaire.

