




VIDAR Set - Installation instruction

Mounting


The VIDAR Set is designed to be mounted in in a suspended ceiling

- 1.) Remove the acoustic panel where the luminaire should be mounted. (see placement guide on page #2)
- 2.) Use the Hole Template (included in the package) as a guide to make holes for power cable and mounting screws in the acoustic panel. Use a 4-5 mm drill for the two mounting screw holes marked with a V and a sharp knife for the power cable hole marked with a V.

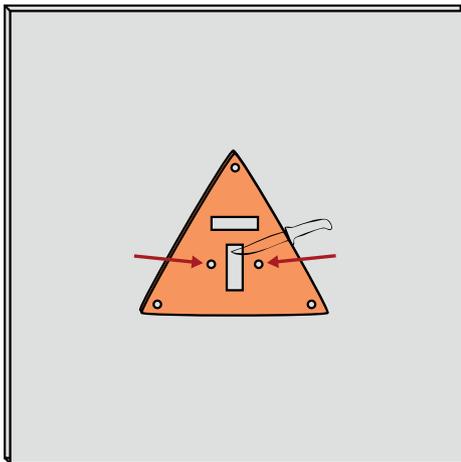


- 3.) Push the power cable through the hole in the acoustic panel. Fasten the ceiling cup mounting bracket to the acoustic panel using the two screws and wing nuts included in the package. In some cases, the Hole Template can be used to support the weight on the acoustic panel.


Note: Check with ceiling manufacturer that your ceiling can handle the weight of the luminaire at the installed position.

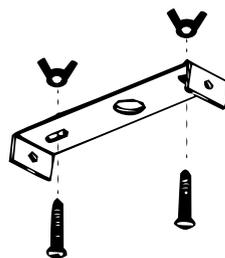

- 4.) Fasten the ceiling cup to the bracket with the two screws.
- 5.) Holding the ceiling cup, lift the acoustic panel and luminaire. Put the acoustic panel back in place carefully.

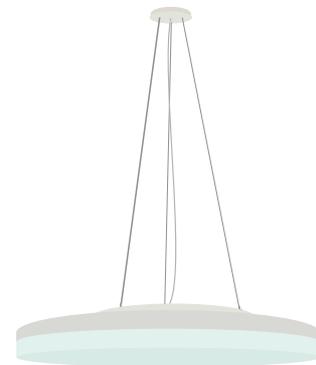

- 5.) Connect the power cable WAGO connector to the Biocentric light control box.

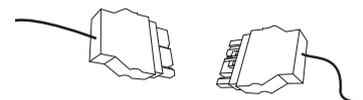


- 6.) Adjust mounting height by pushing down the pin on the wire locks located on the luminaire body. Adjust length of electric cable and fasten the plastic cable locks. (see placement guide on page #2).

Placement guide

Specified mounting height: 175 cm from floor to top of luminaire.

Center the luminaire(s) over the table according to the illustration.

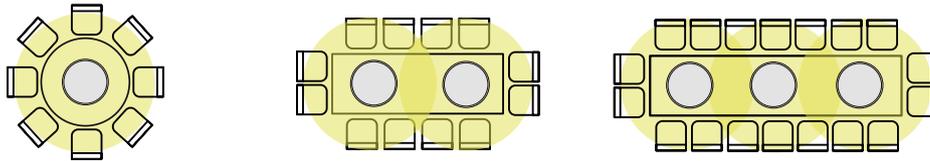

Luminaire data

Luminaire weight 5.2 kg

Light source energy class: C

User replaceable light source: No

Warning

- Disconnect or turn power off before installation, maintenance or service.
- Installation requires knowledge of luminaire's electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- Brainlit's luminaires must be installed in compliance with international wiring regulations (EN, IEE, NEC etc.).
- Secure luminaire compatibility with input voltage and frequency.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects.
- Risk of fire or electric shock. Keep combustible and other inflammable materials away from lamp/lens.
- The luminaire is not suitable for covering with thermally insulating material.
- Do not operate in close proximity to persons, inflammable materials or substances affected by heat or drying.
- Wear gloves and safety glasses when removing luminaire from carton, installing, servicing or performing maintenance.
- Do not touch enclosure or light source.
- Allow lamp/luminaire to cool down before handling.
- The connecting cable is not waterproof.
- No user serviceable parts inside of luminaire.
- Luminaire to be independently supported to building structure.
- Avoid direct eye exposure to light source when luminaire is on.

This document contains information that is subject to change without notice. This document is solely intended for, and may only be used for, the purpose of providing luminaire products to the BrainLit BioCentric Lighting System. The performance indications for BrainLit products set forth in this document are based on, and conditioned on, the products being used solely in the BrainLit BioCentric Lighting System. However, this document shall not be deemed a product warranty, whether express or implied. The BrainLit product warranty is solely contained in the purchase agreement with each customer. This document is subject to BrainLit AB's copyright. No part of this document may be reproduced or transmitted in any form or by any means, or shared with any third party, without the prior written approval of BrainLit AB. BrainLit products may be protected by one or more patents and by copyright and design rights. "BrainLit" and "BioCentric Lighting" are registered trade marks of BrainLit AB. This document does not confer upon the recipient a license to any of BrainLit intellectual property rights.