



PRODUCT SPECIFICATION

BCL Ceiling Panel

ASK 2x2 US



SOLUTION DESCRIPTION

PRODUCT DESCRIPTION

The BrainLit Ask is a dynamic LED ceiling panel that brings brightness to any room. It instantly alters the emotional experience of a space. By dynamically adjusting its color temperature anywhere between ice blue white (7300K) to warm white (2700K), you can transform the ambience of a room and promote the circadian alignment.

The BrainLit Ask luminaire embraces the black body curve with exceptional color rendering, while dimming smoothly down to 0.1%. In addition, this new technology allows you to respond to changing demands in lighting requirements or design without replacing fixtures.

Article no: BLT_LM-030/22-05-011/F_GG


MEASUREMENTS / PACKAGING

Weight (pound)	8lb 8oz
Size LxWxH (inch)	24x24x7/16
Diameter (inch)	N/A
Box quantity	4
Boxed size LxWxH (inch)	31x26x13
Boxed weight (pound/kg)	49.6/22,5

AREAS OF USE (examples)

Office	High Value Offices / High Risk Offices / Meetings & Seminar Rooms
Industrial	High Value Manufacturing / High Risk Operations / Control Rooms
Education	Conference Centres / Class Rooms
Hospitality	Customer Interaction Centres / Receptions / Conference Rooms / Premium Room Settings / Terminals / Lounges
Healthcare	Surgical Theaters / Sterile Processing Dep. / Intensive Care Units / Wards-Long Term Care / Dialysis Centres
Residential	Nursing Homes / Elderly Care / Luxury Room Settings

Driver size LxWxH (inch):
 10 5/8 x 7 5/8 x 3 1/2

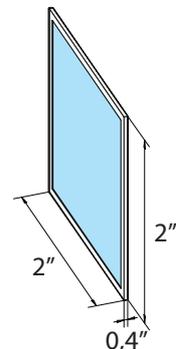

MARKET AVAILABILITY

EMEA	See EU line
AMERICAS	US
APAC	See JP line



PRODUCT TECHNICAL SPECIFICATION

LIGHT PROPERTIES

Light source type	LED
LED color temperature	7300K~2700K
Color rendering	CRI/Ra >90
Lumen output	3800lm
Beam angle	110°
Flicker handling	Compliant with IEEE1789

POWER PROPERTIES

Maximum rated power	50W
Supply voltage range	120-277V
Supply power frequency	50/60Hz
Efficiency LED driver	>90 %
Maximum circuit breaker loading (no of luminaires):	B10 B13 B16 C10 C13 C16
@230V	43 56 69 43 56 69
@120V	14 18 22 14 18 22
@100V	See JP line


DALI device type	6
DALI-2 compliant	Yes
Power supply and DALI connector	Terminal connectors

MECHANICAL PROPERTIES


Colors	Anodized aluminum (AL)
Material	Aluminum + PMMA
Lifespan	50 000 hours
Configuration	Edge lit panel for drop down ceiling
Mounting	Recessed, surface or pendant using frame
Seismic support	Seismic Brackets
IP rating	Damp Locations
Certifications	CE, UL, RoHS
Warranty	5 years

TYPICAL CHARACTERIZATION DATA


Light distribution

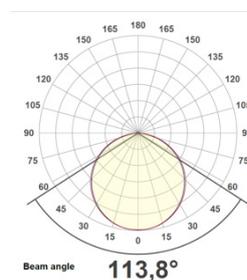


Beam description

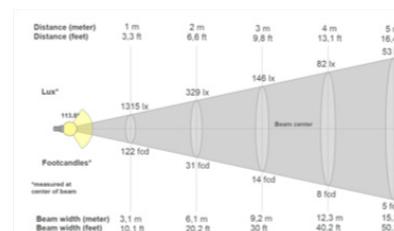

Color rendering TM-30

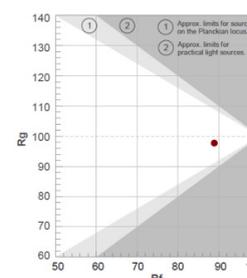

Color rendering CRI, (CIE 1931)

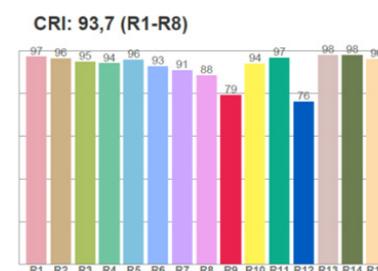

GRAPHS SHOWING DATA FOR EU VERSION

This document contains information that is subject to change without notice. This document is solely intended for, and may only be used for, the purpose of providing luminaire products to the BrainLit BioCentric Lighting System. The performance indications for BrainLit products set forth in this document are based on, and conditioned on, the products being used solely in the BrainLit BioCentric Lighting System. However, this document shall not be deemed a product warranty, whether express or implied. The BrainLit product warranty is solely contained in the purchase agreement with each customer. This document is subject to BrainLit AB's copyright. No part of this document may be reproduced or transmitted in any form or by any means, or shared with any third party, without the prior written approval of BrainLit AB. BrainLit products may be protected by one or more patents and by copyright and design rights. "BrainLit" and "BioCentric Lighting" are registered trade marks of BrainLit AB. This document does not confer upon the recipient a license to any of BrainLit intellectual property rights.