




## PRODUCT SPECIFICATION

### LIV Ceiling Panel 60x60

P/N: 100044

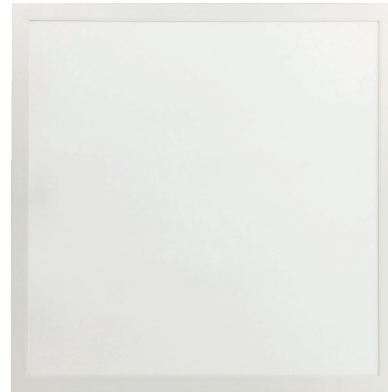

## SOLUTION DESCRIPTION

### PRODUCT DESCRIPTION


The BrainLit Liv is a dynamic LED ceiling panel that brings brightness to any room. It instantly alters the emotional experience of a space. By dynamically adjusting its color temperature anywhere between ice blue white (6500K) to warm white (2700K), you can transform the ambience of a room and promote the circadian alignment. The BrainLit Liv luminaire embraces the black body curve with exceptional color rendering, while dimming smoothly down to 0,1%.

### AREAS OF USE (examples)

<b>Office</b>	High Value Offices / High Risk Offices / Meetings & Seminar Rooms
<b>Industrial</b>	High Value Manufacturing / High Risk Operations / Control Rooms
<b>Education</b>	Conference Centres / Class Rooms
<b>Hospitality</b>	Customer Interaction Centres / Receptions / Conference Rooms / Premium Room Settings / Terminals / Lounges
<b>Healthcare</b>	Surgical Theaters / Sterile Processing Dep. / Intensive Care Units / Wards-Long Term Care / Dialysis Centres
<b>Residential</b>	Nursing Homes / Elderly Care / Luxury Room Settings

## MEASUREMENTS / PACKAGING

<b>Weight (kg)</b>	1,75
<b>Size LxWxH (mm)</b>	595x595x30
<b>Box quantity</b>	6
<b>Boxed size LxWxH (mm)</b>	640x260x660
<b>Boxed weight (kg)</b>	13

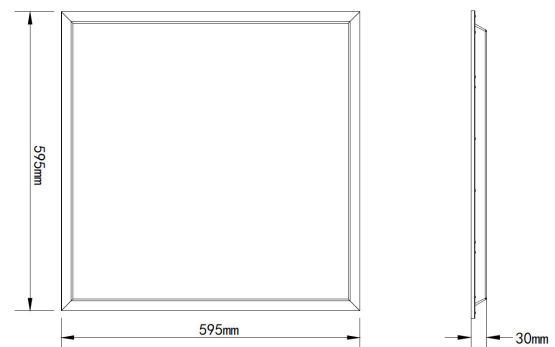

Driver size LxWxH (mm): 145x45x28

## MARKET AVAILABILITY

EMEA	EU
------	----



## PRODUCT TECHNICAL SPECIFICATION

### LIGHT PROPERTIES

Light source type	LED
LED color temperature	2700K-6500K
Color rendering	CRI/Ra >90
SDCM	<3
Lumen output	3700lm
mDER range	45%-95%
Beam angle	110°
Dimming range	0.1% - 100 %
Flicker handling	$P_{st}^{LM} \leq 1$ , SVM $\leq 0.4$ , IEEE 1789 comp.
Lifetime	0.90 (LLMF 50 000h) >100 000h (L70B50) 50 000h (L90B50)

### POWER PROPERTIES

Rated input	40W
Efficacy*	100lm/W
Supply voltage range	220-240V
Supply power frequency	50/60Hz
Maximum circuit breaker loading (no of luminaires):	B10 B13 B16 C10 C13 C16 @230V 43 56 69 43 56 69
DALI device type	8
DALI-2 compliant	Yes
Power and DALI connector	WAGO WINSTA®. Cable length 1,5m

### MECHANICAL PROPERTIES


Colors	White (RAL 9016)
Material	Aluminum + Polystyrene
Configuration	Backlit panel for drop down ceiling
Mounting	Recessed or surface using frame
IP rating	IP20
Certifications	CE
Warranty	5 years

\*At maximum intensity and neutral white CCT


This document contains information that is subject to change without notice. This document is solely intended for, and may only be used for, the purpose of providing luminaire products to the BrainLit BioCentric Lighting System. The performance indications for BrainLit products set forth in this document are based on, and conditioned on, the products being used solely in the BrainLit BioCentric Lighting System. However, this document shall not be deemed a product warranty, whether express or implied. The BrainLit product warranty is solely contained in the purchase agreement with each customer. This document is subject to BrainLit AB's copyright. No part of this document may be reproduced or transmitted in any form or by any means, or shared with any third party, without the prior written approval of BrainLit AB. BrainLit products may be protected by one or more patents and by copyright and design rights. "BrainLit" and "BioCentric Lighting" are registered trade marks of BrainLit AB. This document does not confer upon the recipient a license to any of BrainLit intellectual property rights.

## TYPICAL CHARACTERIZATION DATA


### Light distribution



### Beam description

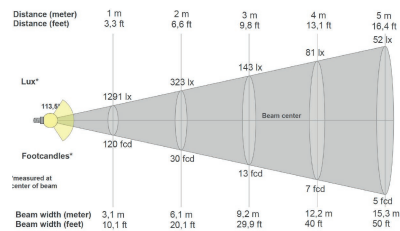

### Color rendering TM-30



### Color rendering CRI, (CIE 1931)

